

Self Diesel operated Mobile Crane Max. Capacity Lbs. 55,100



Valla	
OUTREACH (Ft)	CAPACITY (Lbs.)
9	26,000
15	14,000
23	9,000



TECHNICAL DATA

CRANE FRAME: fabricated form preformed and welded steel plate with built-in counterweight.

ENGINE: diesel 4 cylinders water cooled .

TRANSMISSION: automatic (hydrostatic) "automotive". Differential axle. Max speed 15 Km/h.

BRAKES: foot hydraulically operated brakes. Parking hand brake mechanically operated.

STEERING: power steering operated through own hydraulic circuit. Fitted with safety valves and filter.

WHEELS: nr. 2 rear pneumatic 12.00-24 - nr. 4 front superelastic 12.00-24.

HYDRAULIC SYSTEM: electric proportional distributor controlled with joystick. Fitted with filter and safety valves. Maximum hydraulic pressure 220 Bar.

BOOM: boom fabricated from preformed and welded quality steel plate. Nr.4 telescoping sections: 1 fixed; 3 hydraulically telescoping. Fitted with nylon wear pads adjustable wear pads on the sides.


LMI: electronic Load Moment Indicator. Display showing lifted load, max allowed load, tilting percentage, operating radius, angle, telescope and light indicators on the operative mode.

TOTAL WEIGHT: approx. Lbs. 55,500 MAX. CAPACITY: Lbs. 55,100

Options on request: hydraulic winch; chain hoists; carry-deck; manual and hydraulic jibs; cable remote control; radio remote control; man bucket and relevant certification as aerial platform; full set of road lights; non marking tires.



VALLA mobile crane mod. 250D complies with the following standards: -2006/42/CE -UNIEN13000 -I.S.P.E.S.L.

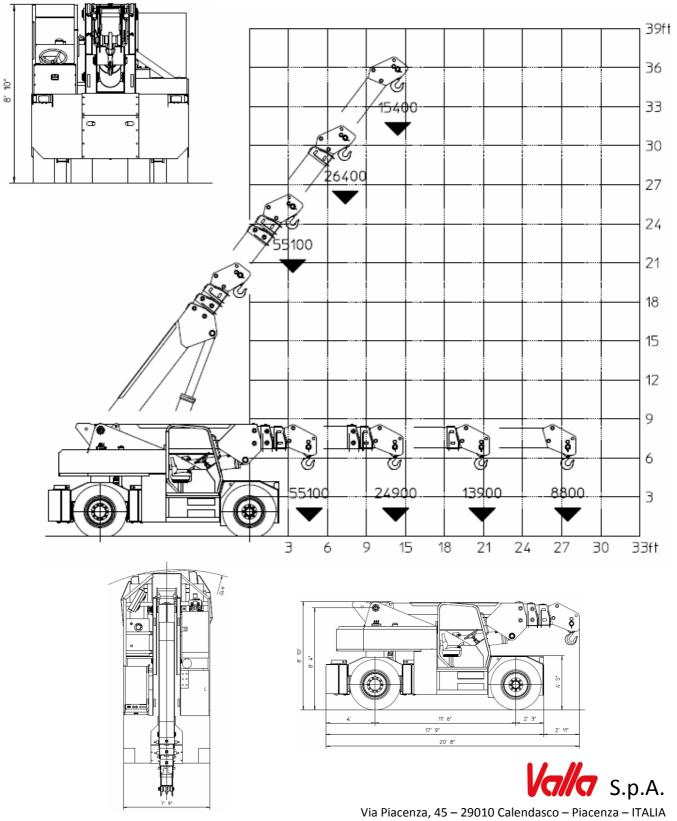

Via Piacenza, 45 – 29010 Calendasco – Piacenza – ITALIA Tel. 0039 0523 762025 – 762004 – Fax 0039 0523 760531 Internet: <u>www.valla.com</u> – email: info@valla.com

Lbs./ft