



673E | Crawler

SENEBOGEN



70 t TELESCOPIC CRAWLER CRANE

 186 kW /  70 t /  36 + 15 m /  MAX CAB

Stage V

673E

The unique machine.

The 70 t telescopic crawler crane is a unique machine class – compact enough for downtown construction sites but with sufficient load reserves for heavy work.

The 673 E is ideal for flexible use on the construction site: lifting loads, turning, swinging, moving and precisely setting them down, and all on an incline. This is possible thanks to features such as the continuously telescoping Full Power Boom, variable ballasting thanks to counterweight components and the heavy-duty crawler chassis. Folding railings, telescopic undercarriage and ballast storage system ensure easy transport and shorter set-up times.

More variety

Always work optimally with loading hook, auxiliary jib, 8 m fly jib or fly jib extension to 15 m. Boom lengths of more than 51 m are possible with the fly jib.

More flexibility

The Full-Power Boom telescopes comfortably under load at any length and safely via the jystick. The telescopic crawler undercarriage easily adapts to even the tightest of spaces.

Maintenance & service

This is made easy with standard components and easy-to-access maintenance and service points.


Ultimate ease of use

With the 20° tiltable comfort Maxcab as standard, the back-friendly comfort seat, the adjustable armrests and the optimally arranged, resonant control elements.

On site and ready to use fast

Easy transport including crawler tracks. Short set-up time thanks to self-assembly system – no auxiliary crane required.

The photo shows the 673 E in prefabricated concrete component assembly, Germany.

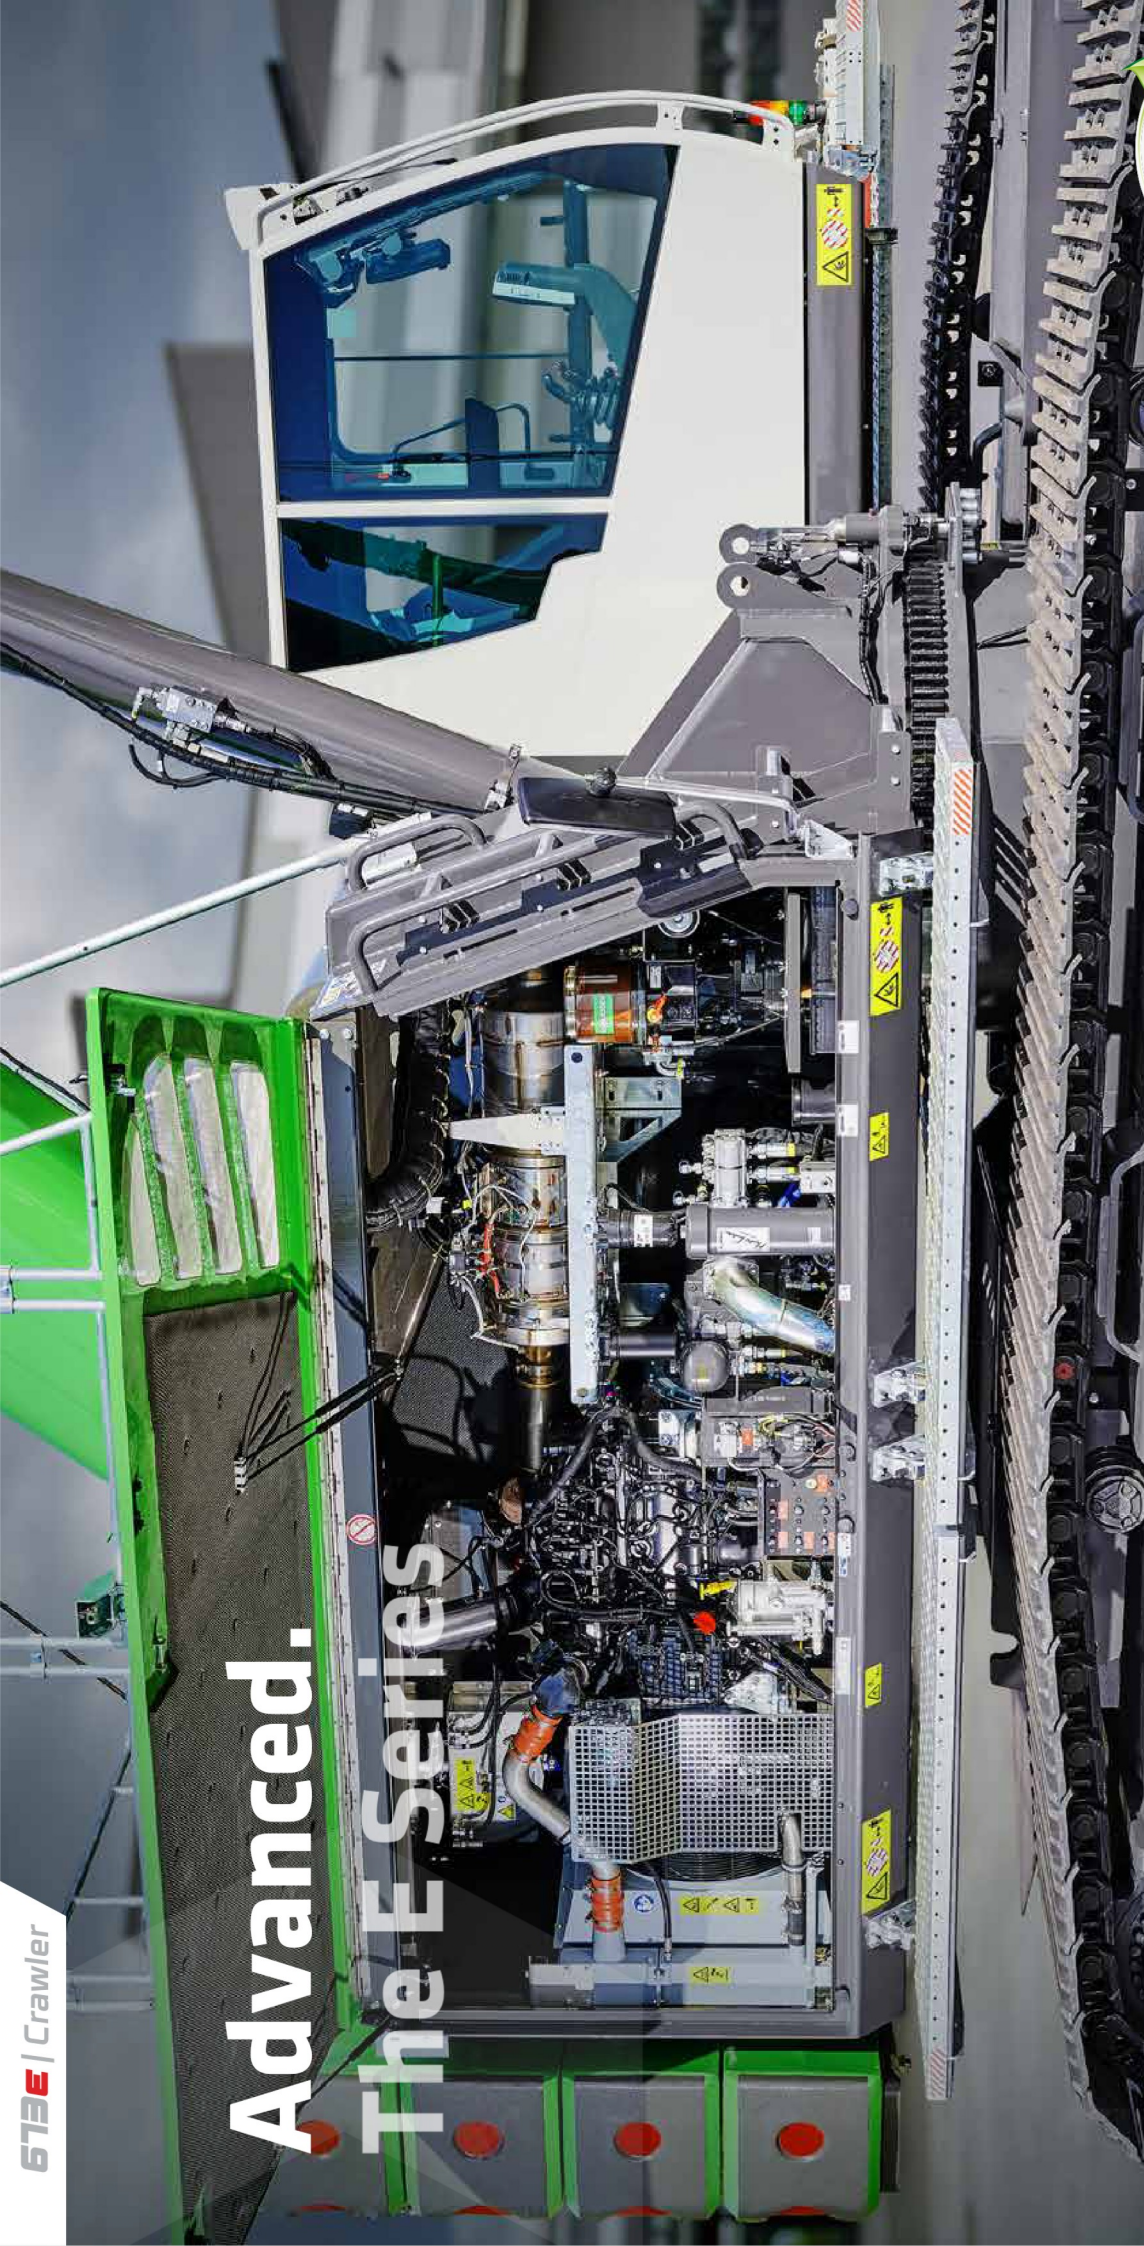

Advanced. The E Series

LONG SERVICE LIFE, HIGH VALUE RETENTION

- ✓ Reliable and powerful thanks to its robust construction and high-quality components
- ✓ High resale value, even after many years of use

SOPHISTICATED, STATE-OF-THE-ART TECHNOLOGY

- ✓ In the 5th Generation – decades of experience in designing and constructing telescopic cranes

SIMPLE TO MAINTAIN AND SERVICE


- ✓ Technology that can be mastered and no over-engineering, easy access to all components

ENVIRONMENTALLY- FRIENDLY DRIVE TECHNOLOGY

- ✓ State-of-the-art engine, drive and emission systems in line with the latest technology standards (stage V)
- ✓ Large-scale pipes and valves for maximum efficiency



A MODULAR DESIGN. OPTIMUM EQUIPMENT OPTIONS.

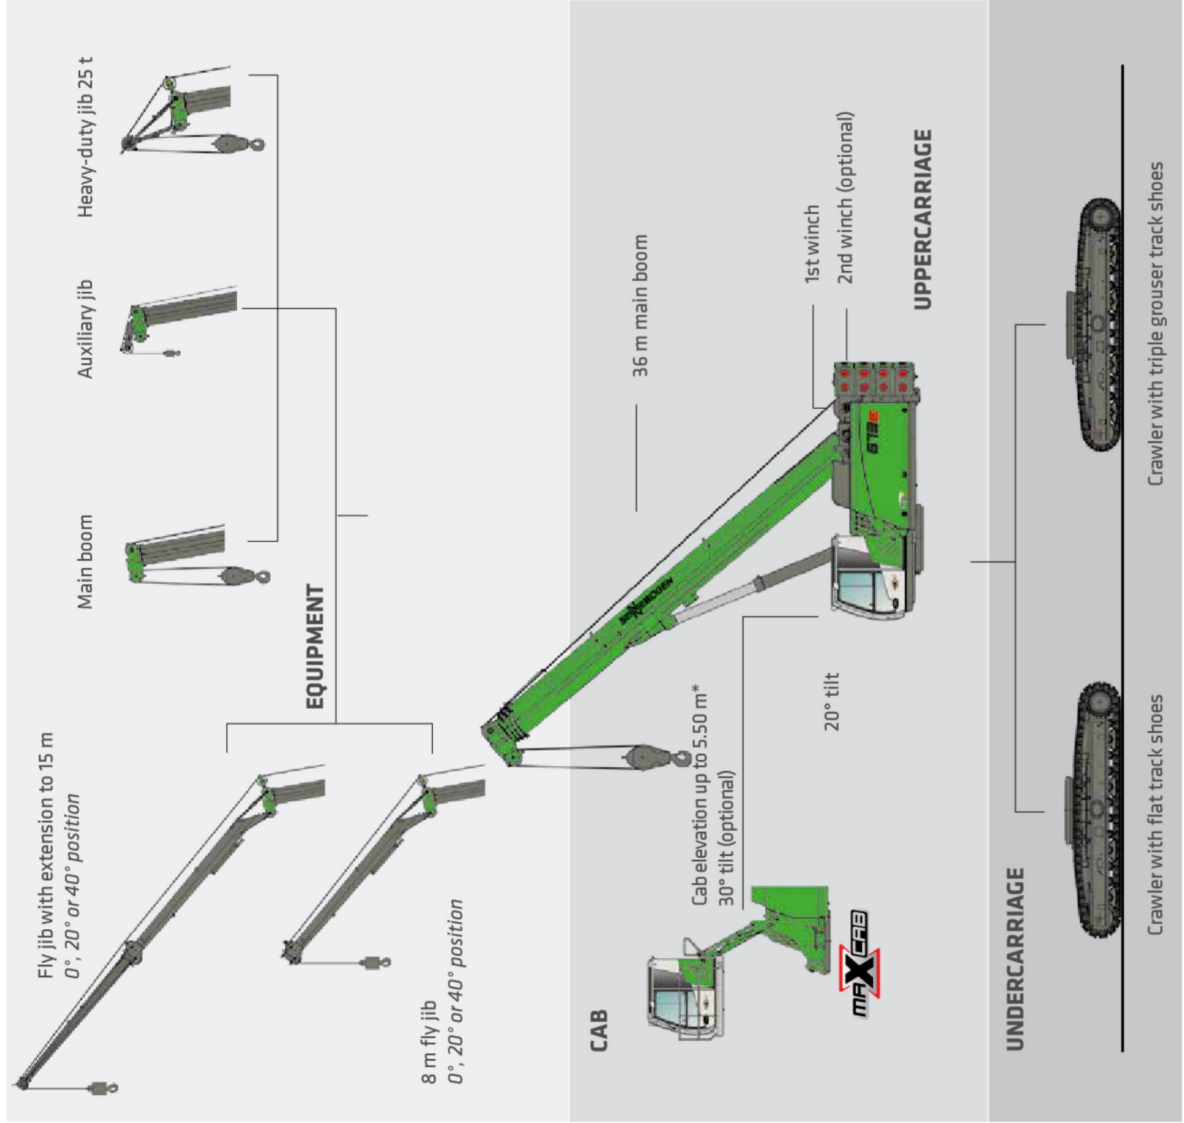

OUTSTANDING FLEXIBILITY.

WITH THE FULL POWER BOOM

FULL-POWER BOOM

up to
51 m
boom length**

- Convincing: the robust boom system can telescope easily and safely even with a load on the hook.
- Simple and convenient: can be operated using the joystick for any boom length, without needing to preselect length and load.
- Automatically optimal: always the best load capacity for each boom length.
- Steep things: can work on inclines of up to 4°*
- Comfortable work area: maximum main boom length 36 m and folding 8 m or 15 m fly jib.

* with reduced load charts (optional)
** with 15 m fly jib (not shown)

Pick & Carry
with up to

100%
load



**COMPACT AND
STRONG.
WITH MAXIMUM
FLEXIBILITY.**

- High stability and optimum maneuverability even on narrow construction sites thanks to telescopic crawler undercarriage
- Optimal overview when lifting loads thanks to cab with 20° tilt as standard
- Coverage of a large work area and flexibility thanks to a wide range of equipment options
- Operation by radio remote control available

Moves e.g. with

44.9 t

at 5.0 m radius




Lift loads and move with maximum load capacity.

**BETTER VIEW.
BETTER SAFETY.
MAXIMUM COMFORT.**



**THE BEST
IN ITS CLASS.**

- Excellent all-round and upward view thanks to large window panes, optionally with FOPS guard and/or bullet proof glass
- Safe and comfortable access due to the tried-and-tested sliding doors incl. sliding window
- Work without fatigue thanks to the back-friendly comfort seat, adjustable armrests and ergonomic, resonant controls
- Automatic heating/air conditioning with optimum air flow for a pleasant indoor climate all year round
- Noise reduced through sound-absorbing materials and design solutions
- Option for cab to hydraulically elevate up to an eye level of 5.50 m and tilt by up to 30°
- Radio with Bluetooth®

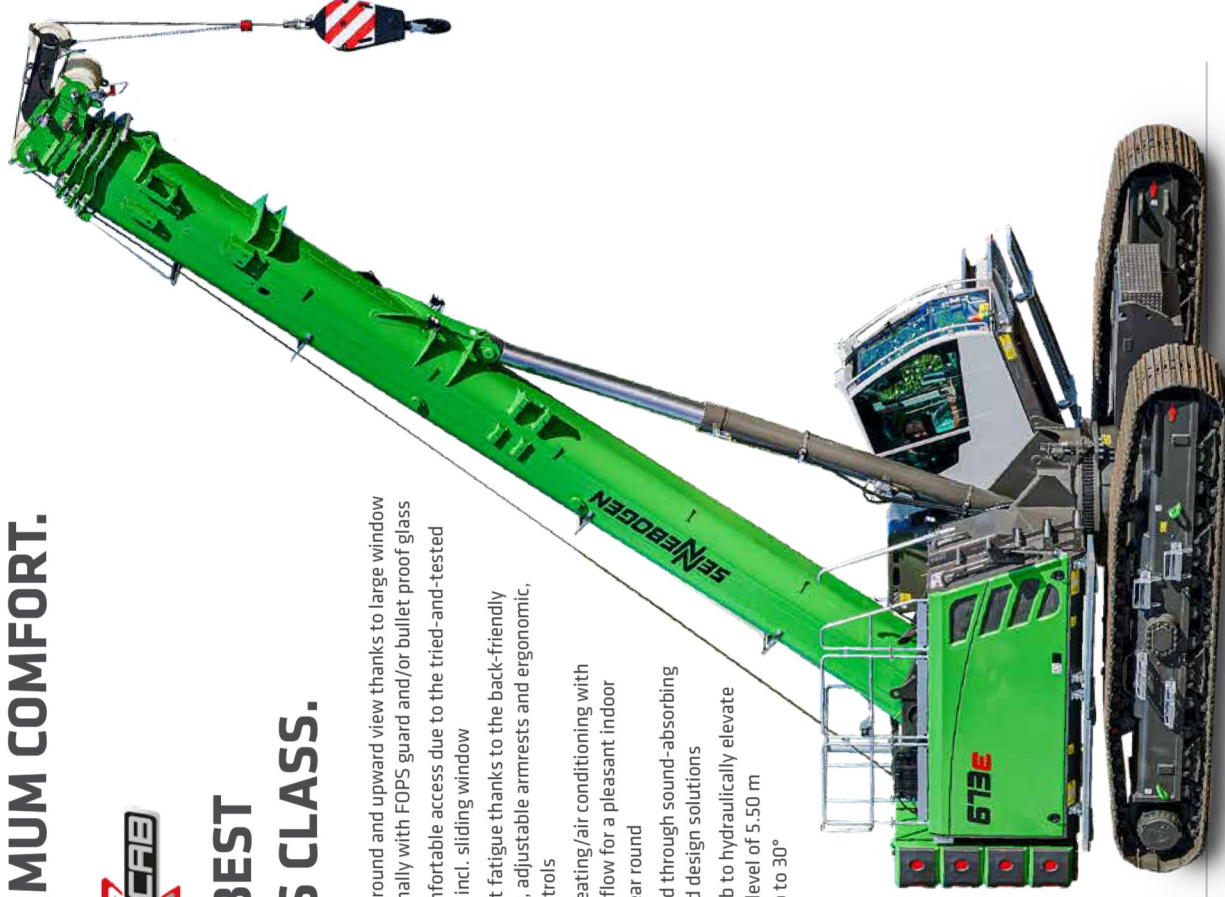

PANORAMIC VIEW

20°
up to
tiltable as standard

particularly spacious for
maximum operator comfort
(inner width: 87 cm)

TAKE FULL CONTROL WITH OUR JOYSTICKS

- Joysticks on resonant, seat-mounted consoles
- Comfortable grip thanks to ergonomic design
- Shortcuts for direct and sensitive control of all functions
- Easy to use thanks to the optimized design of buttons and switches



EASY TO TRANSPORT. READY FOR USE QUICKLY.

It is not just with procurement and operating costs that companies can make cost-effective decisions and savings. Astute contractors know that simple and economical transportation between construction sites is an important factor, too.



Cost-efficient

With a transport width of just 3.0 m, the 673 E fits easily on any standard low-loader.



Easy

The machine can be transported along with its crawler tracks. For even easier transport.




Quick

The machine is ready for use on site in a short time thanks to the innovative self-assembly system.

MAINTENANCE AND SERVICE. MAKE IT EASY ON YOURSELF.



The SENCON control system supports you with diagnostics and makes troubleshooting easier. So your machine is back in action more quickly.

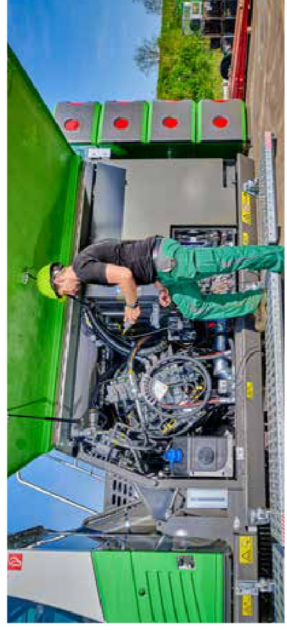

All maintenance and service points are clearly arranged and easily accessible. The clear labeling of components makes finding your way around easy.

KEEP IT SIMPLE. WITH TECHNOLOGY THAT CAN BE MASTERED.



Reliable and practical technology makes life easier. Where electronics add no value, we rely on hydraulics and electrical systems.



We make you happy, not reliant. With cost-effective components and fewer process steps, you can take care of the machine on your own.



At the central electrical distribution board, clearly arranged standard components simplify control and troubleshooting.

TECHNICAL DATA, EQUIPMENT

MACHINE TYPE	
MODEL (TYPE)	673 Crawler
ENGINE	
TYPE	Stage V:
	Cummins B6.7 FR5885
	Rated power: 168 kW/2200 rpm Operating point standard: 186 kW/2000 rpm Operating point ECO: 188 kW/1850 rpm
	Stage IIIa:
	Cummins Q586.7 FR96045
	Rated power: 164 kW/2200 rpm Operating point standard: 164 kW/2000 rpm Operating point ECO: 170 kW/1850 rpm
Both:	
direct injection, turbocharged, charge air cooling, reduced emissions	
COOLING	Water-cooled
DIESEL FILTER	With water separator and heater
AIR FILTER	Dry filter with integrated pre-separator, automatic dust discharge, main element and safety element, contamination indicator
FUEL	440 l
ADBLUE	45 l
ELECTRICAL SYSTEM	24 V
BATTERIES	2 x 155 AH
OPTIONS	Low temperature packages
	Electric fuel pump



Optional: Customized paint finish

UPPERCARRIAGE	
DESIGN	Torsion-resistant box design, precision crafted, steel bushings for boom mountings. Service-friendly design, engine installed in the longitudinal direction
ELECTRIC	Central electrical distributor, battery disconnect switch
LIGHTING	LED headlights for optimal lighting of the work area
COOLING SYSTEM	3-circuit cooling system with high cooling output, electrically regulated fan drive for cooling water, charged air and oil
SAFETY	Camera monitoring of the area to the rear and the right side Folding uppercarriage railings
OPTIONS	Additional LED headlights
	LED flashing lights
	2 warning beacons at the rear
	Additional cameras
	Sea climate resistant coating as corrosion protection
	Customized paint finish
	Low temperature package
	Automatic central lubrication for boom attachment point, luffing cylinder and live ring track
	Pinion tooth lubrication



Optional: additional LED headlights

TECHNICAL DATA, EQUIPMENT

HYDRAULIC SYSTEM / HYDRAULICS	
Pump unit attached directly to diesel engine. Load-sensing/LUDV hydraulic system, electro-hydraulic work functions, load limit control, axial piston variable displacement pump. Multiple work functions can be controlled precisely simultaneously and independently from each other thanks to the independent, proportional allocation of the pump flows.	
FLOW RATE	Up to 375 l / min
OPERATING PRESSURE	Up to 330 bar
FILTRATION	High-performance filtration with long change interval
HYDRAULIC TANK	765 l
CONTROL SYSTEM	Proportional, precision hydraulic control of the movements, 2 servo joysticks for work functions, additional functions via switches and foot pedals – arranged clearly and ergonomically
SAFETY	Hydraulic circuits with safety valves Pipe-fracture safety valves for luffing cylinder and telescopic cylinder
OPTIONS	Bio-oil filling
	SENNEBOGEN HydroClean micro-filter system (3 µm) with water separator Hydraulic tank preheating

SLEWING DRIVE

GEARS	Compact planetary gear with bent-axis hydraulic engine, integrated brake valves
SLEW BRAKE	Spring-loaded multi-disk brake
SLEWING RING	Large-scale, externally geared 1-row slewing ring
SLEWING SPEED	0-2 rpm, variable

CAB	
CAB TYPE	Maxcab, tiltable 20°
CAB FEATURES	Comfortable operator cab with sliding door incl. sliding window, vibration damper, tinted safety glass, opening windshield, skylight, front and rear windshield wipers, 12 V / 24 V connections, 2 headlights integrated into the front of the roof.
	Air-sprung comfort operator's seat with seat heating and headrest. Sunblind for skylight. Slow brake via foot pedal.
	Hydraulically elevating cab type E270, can elevate up to 2.70 m and tilt by 30°
	Auxiliary heating system with timer
	Activated-carbon filter for cab
	Protective roof grating
	FOPS protective roof grating
OPTIONS	Glazing of roof and windshield in bulletproof glass design
	Radio with USB and SD connections, MP3 and Bluetooth® functions



Optional: protective roof grating

TECHNICAL DATA, EQUIPMENT




Option: folding platforms on both sides of the uppercarriage

EQUIPMENT	
BOOM	4-section with pulley head, hydraulically telescopic end-to-end from 11 to 36 m, luffing from 0° to 80° in approx. 50 seconds; complete telescopic extension in 140 seconds
CRANE SAFETY	Latest generation of load moment monitoring with event recorder, clear operations panel showing all important data via the SENCON display, lifting limit switch, cable exit protection, pressure relief valves and pipe fracture protection SENtrack telemetry system
CYLINDERS	Hydraulic cylinders with high-quality sealing and guide elements
OPTIONS	8 m folding fly jib, tiltable (0°, 20°, 40°), can be set up without additional equipment, can be bolted to basic boom when not in use Fly jib extension to 15 m (7 m extension), load capacity 5 t, tiltable (0°, 20°, 40°), can be bolted to basic boom when not in use Auxiliary jib: 5 t load capacity, 1-strand 25 t heavy-duty jib Customized paint finish Electro-hydraulic emergency unit Radio remote control Programmable working limit Additional load charts accepted for 2°/4° incline position



Optional: radio remote control

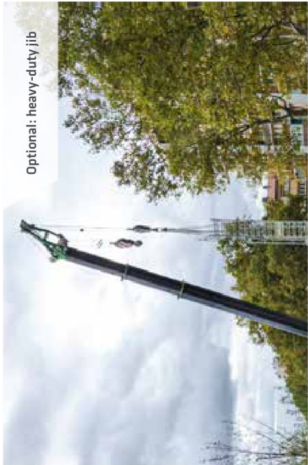

Optional: heavy-duty jib



Optional: auxiliary jib



Optional: work area limitation

TECHNICAL DATA, EQUIPMENT


UNDERCARRIAGE	
DESIGN	T73/410 crawler undercarriage, hydraulically telescopic and with integrated, protected drive transmission
DRIVE	Strong travel drive with 2-stage variable-displacement hydraulic engine and directly attached automatically functioning brake valve and compact planetary gear on each running gear side
SLEW BRAKE	Spring-loaded multi-disk brake
CRAWLER CARRIER	Maintenance-free tractor chassis with hydraulic chain tension, 700 mm triple grouser shoes
SPEED	0 - 2.7 km/h
OPTIONS	Track shoes equipment options: 800 mm triple grouser shoes 900 mm triple grouser shoes 700 mm flat track shoes 800 mm flat track shoes

WINCH	
Winches are driven by constant motors, ensuring optimum traction and speed control at all times. Hydraulic lowering brake valves for sensitive, wear-free braking. Strong oil bath planetary gears, low-maintenance. Holding brakes are spring-loaded, maintenance-free, low-wear disc brakes running in the oil bath, oil-cooled	
SAFETY BRAKE	Spring-loaded multi-disk brake
OPTIONS	2nd winch: 50 kN tensile force (4th position), cable speed 0 - 115 m/min., cable diameter 16 mm, max. cable length 205 m



Optional: 2nd crane winch

OPERATING WEIGHT	
MASS	appr. 71,500 kg with 36 m telescopic boom, 8 m fly jib, 35 t hook, 700 mm triple grouser shoes, 2 hoist winches, with hydraulic telescopic undercarriage, ballast 17.8 t, undercarriage ballast 8 t
NOTE	Operating weight varies by model and equipment. Subject to technical changes!

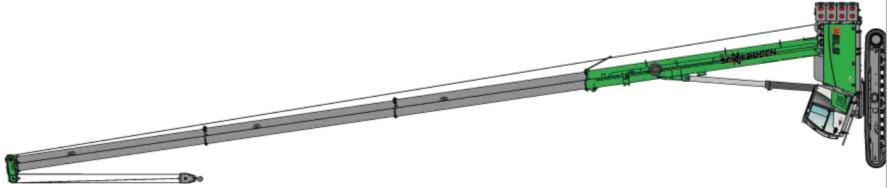


CRANE EQUIPMENT



MAIN BOOM
HA 36 m



MAIN BOOM
HA 36 m

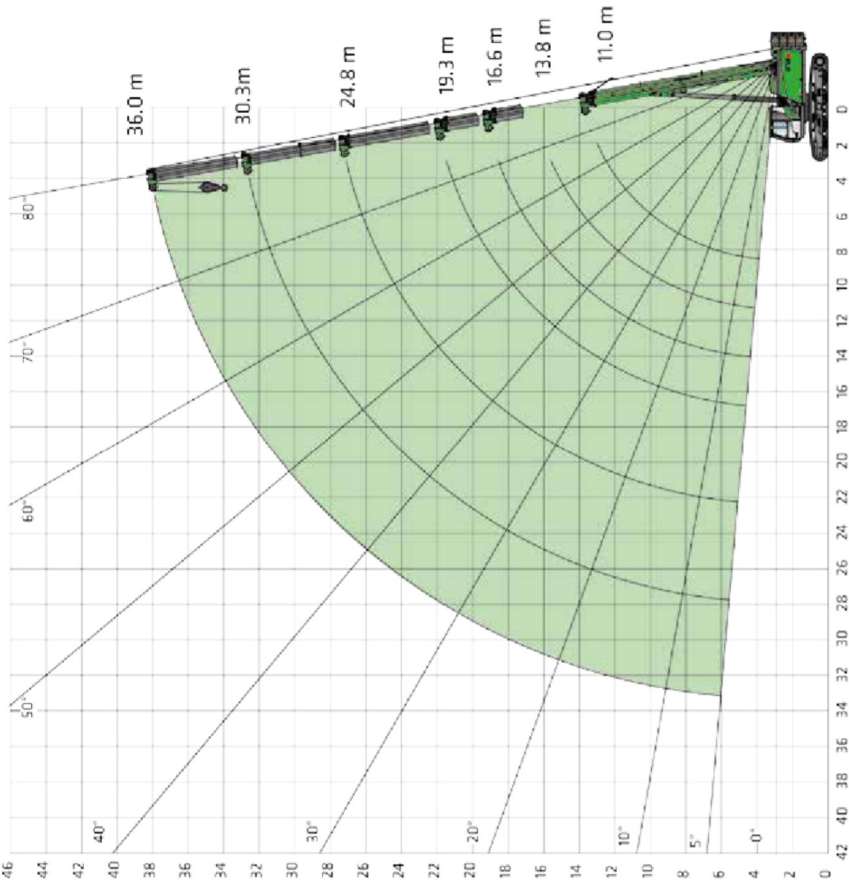

CRANE EQUIPMENT

CRANE EQUIPMENT

**EN**

UNDERCARRIAGE BALLAST
8.0 t

**EN**

UNDERCARRIAGE BALLAST
8.0 t

RADIUS [m]		BOOM LENGTH [m]															
	11.0	13.8		16.6		19.3		24.8		30.3		36.0					
Ballast [t]	 	 	 	 	 	 	 	 	 	 	 	 	 				
	17.8 17.8 9.3	17.8 17.8 9.3	17.8 17.8 9.3	17.8 17.8 9.3	17.8 17.8 9.3	17.8 17.8 9.3	17.8 17.8 9.3	17.8 17.8 9.3	17.8 17.8 9.3	17.8 17.8 9.3	17.8 17.8 9.3	17.8 17.8 9.3	17.8 17.8 9.3				
Track width [m]	 	 	 	 	 	 	 	 	 	 	 	 	 				
	4.1 3.2 4.1	4.1 3.2 4.1	4.1 3.2 4.1	4.1 3.2 4.1	4.1 3.2 4.1	4.1 3.2 4.1	4.1 3.2 4.1	4.1 3.2 4.1	4.1 3.2 4.1	4.1 3.2 4.1	4.1 3.2 4.1	4.1 3.2 4.1	4.1 3.2 4.1				
2.0	70.0	50.0															
2.5	69.5	50.0															
3.0	67.2	50.0	61.0	50.0	44.0	44.0	37.8	37.8	22.5	22.5							
4.0	56.0	50.0	53.6	50.0	37.7	37.7	32.6	32.6	22.5	22.5	21.0						
5.0	44.9	41.2	42.0	44.5	37.0	32.9	28.5	28.5	22.5	22.5	20.1	20.1	14.5 14.5 14.5				
6.0	37.3	31.0	31.0	36.9	30.0	30.5	29.1	25.1	22.1	22.1	18.4	18.4	14.5 14.5 14.5				
7.0	31.4	24.5	24.0	30.8	24.0	23.6	26.1	23.5	22.4	19.8	16.9	16.9	14.2 14.2 14.2				
8.0	25.5	20.0	19.3	25.0	19.5	19.0	23.6	19.6	18.7	20.3	19.1	18.5	17.9 17.9 17.9				
9.0				20.8	16.5	15.7	20.5	16.4	15.4	18.4	16.2	15.2	16.4 15.8 15.6				
10.0				17.6	14.0	13.2	17.4	13.9	13.0	16.8	13.8	12.8	15.0 14.0 13.4				
12.0				15.2 / 17.6m	12.6 / 17.6m	11.3 / 17.6m	13.1	10.5 9.5	13.0m	13.0	10.3 9.4	12.8 10.9	10.0 11.0 10.3				
14.0							11.5 / 13.0m	9.0 / 8.3 / 13.0m		10.2 8.0	7.1	10.7 8.3	7.7 9.5 8.6				
16.0										8.1 6.1	5.4	8.6 6.6 6.0	8.3 6.9 6.4				
18.0										7.1 5.3	4.8	7.3 5.6 5.2	6.5 5.8 5.4				
20.0										5.9 4.2	3.8	6.2 4.6 4.2	5.8 4.8 4.4				
22.0										5.3 / 21.0m	3.8 / 21.0m	5.2 3.7	3.4 5.2 4.0				
24.0										4.4 3.0	2.7 4.7	3.4 2.9	3.7 2.5				
26.0																	
28.0																	
30.0																	
32.0																	
Number of falls	14	9	10	13	8	10	9	7	9	8	6	8	5	5	5	3	3
I	0%				33%		66%									100%	100%
II	0%				0%		0%									66%	100%
III	0%				0%		0%									66%	100%
The load ratings must be reduced if there's a 15 m fly jib folded to the side of the main boom.																	
Load capacity reduction [kg]	770				610		510				430		340		280		240

The load ratings must be reduced if there's a 15 m fly jib folded to the side of the main boom.

Load capacity reduction [kg]	770	610	510	430	340	280	240
------------------------------	-----	-----	-----	-----	-----	-----	-----

HOOK

CAPACITY		CABLE REEVING AND MAX. LOAD CAPACITY											
[t]	WEIGHT [kg]	12	11	10	9	8	7	6	5	4	3	2	1
5 t	80 kg												5,000 kg
15 t (1-roll)	190 kg												5,000 kg
35 t	260 kg											15,000 kg	5,000 kg
60 t	850 kg											15,000 kg	5,000 kg
60 t (6-roll)		60,000 kg	55,000 kg	50,000 kg	45,000 kg	40,000 kg	35,000 kg	30,000 kg	25,000 kg	20,000 kg	15,000 kg	10,000 kg	5,000 kg

CRANE EQUIPMENT



AUXILIARY JIB
HA-S




AUXILIARY JIB
HA-S



UNDERCARRIAGE BALLAST
8.0 t



360°

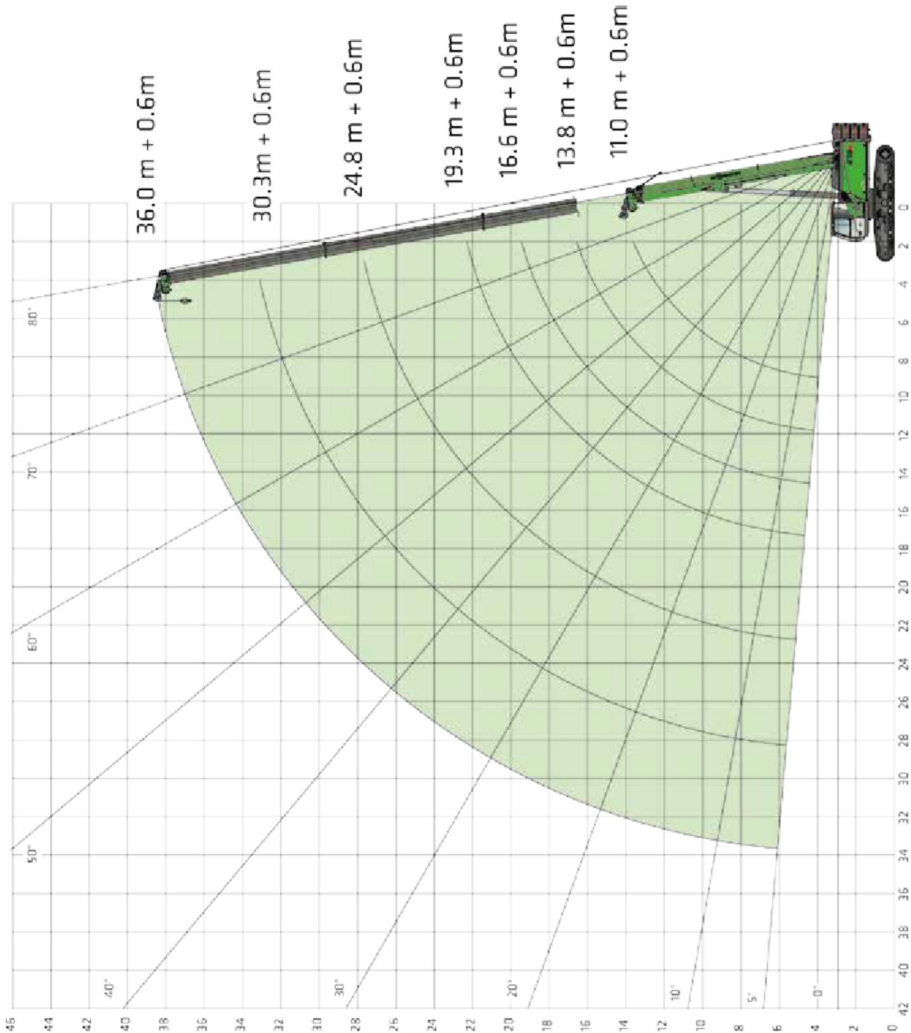

CRANE EQUIPMENT

RADIUS [m]		BOOM LENGTH [m]													
		11.0		13.8		16.6		19.3		24.8		30.3		36.0	
Ballast [t]															
		17.8	17.8	9.3	17.8	17.8	9.3	17.8	17.8	9.3	17.8	17.8	9.3	17.8	17.8
Track width [m]															
		4.1	3.2	4.1	4.1	3.2	4.1	4.1	3.2	4.1	4.1	3.2	4.1	4.1	3.2
2.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0						
2.5	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0						
3.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0					
4.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0				
5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
6.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
7.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
8.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
9.0															
10.0															
12.0															
14.0															
16.0															
18.0															
20.0															
22.0															
24.0															
26.0															
28.0															
30.0															
32.0															
Number of falls	I	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	II	0%	33%	66%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%
	III	0%	0%	0%	0%	0%	0%	0%	0%	33%	66%	100%	100%	100%	100%
The load ratings must be reduced if there's a 15 m fly jib folded to the side of the main boom.															
Load capacity reduction [kg]		770	610	510	430	340	280	240							

CRANE EQUIPMENT




MAIN BOOM
36 m + SLS



Offset angle 0°



Offset angle 20°




Offset angle 40°

β = 20° to 40°

β = 20° to 60°

β = 20° to 80°

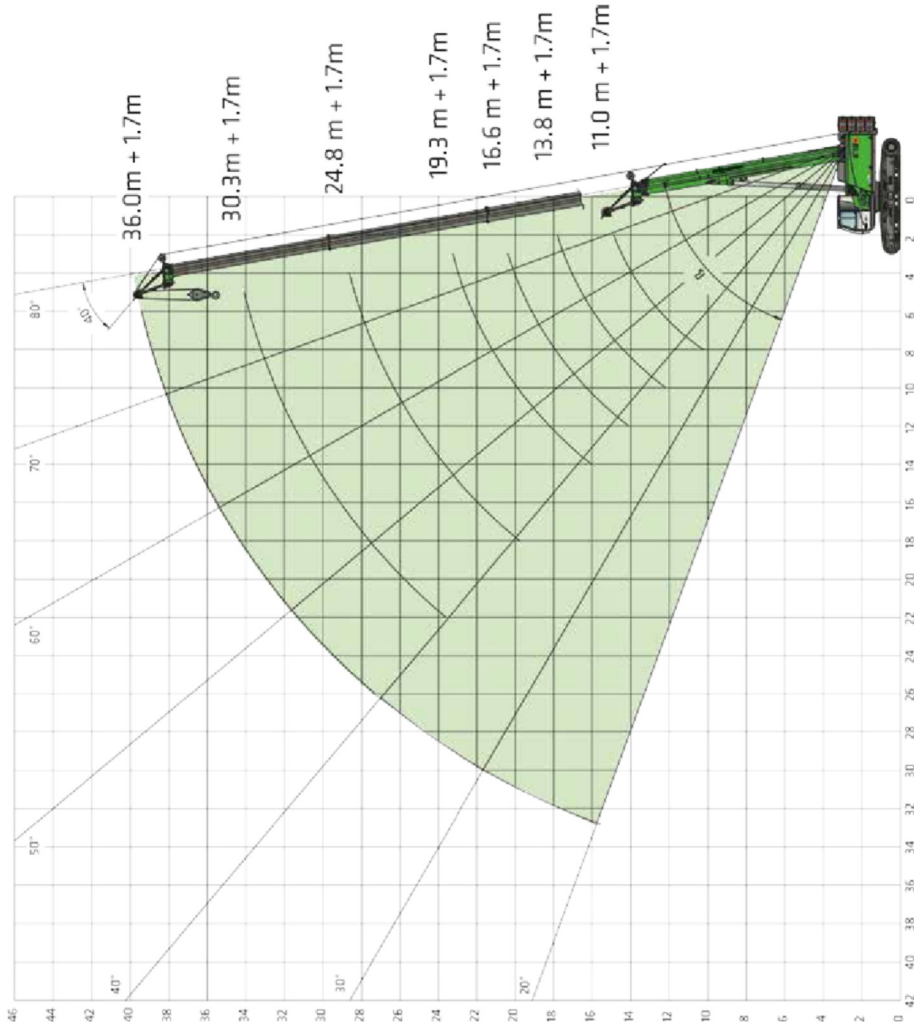

CRANE EQUIPMENT




MAIN BOOM
36 m + SLS



BALLAST
17.8 t



UNDERCARRIAGE BALLAST
8.0 T



TRACK WIDTH
4.1 m

RADIUS [m]		BOOM LENGTH [m]												Number of falls									
		11		13.8		16.6		19.3		24.8		30.3				36							
	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°					
2.0			25.0			25.0																	
3.0			25.0			25.0																	
4.0		25.0	24.2			24.8																	
5.0		25.0	23.8			22.9																	
6.0		25.0	22.3			21.7																	
7.0	21.4	21.4	21.4			21.4	19.8																
8.0	18.7	18.7	18.7			18.7	17.5																
9.0	16.6	16.6		16.6	16.6	15.2																	
10.0				15.0	15.0	12.3																	
11.0				13.5	13.5		14.3	14.5	12.7														
12.0				12.0			12.6	12.7	11.6														
13.0							11.1	11.2		11.1	11.2												
14.0							9.9	10.0		9.7	9.8	9.9											
15.0							8.9			8.6	8.8												
16.0										7.8	7.9												
17.0										7.0	7.1												
18.0										6.4													
19.0												6.7	6.8	6.9									
20.0												6.1	6.2										
21.0												5.6	5.7										
22.0												5.1	5.2										
23.0												4.7											
24.0														4.5	4.6								
25.0														4.1	4.2								
26.0														3.8	3.9								
27.0														3.5	3.5								
28.0														3.2									
29.0														2.9									
30.0																							
32.0																							
34.0																							
Number of falls	5	5	5	4	5	5	3	5	5	2	4	5	2	3	5	2	4	1	2	3	100 %	100 %	100 %
I		0 %			33 %		66 %				100 %				100 %								
II		0 %			0 %		0 %				0 %				33 %								
III		0 %			0 %		0 %				0 %				33 %								

Tab. no.: 673E-75/2068/17.4+8.0/0.5/13 SLS 0.3°

CRANE EQUIPMENT



FLY JIB
SA 8 m / SA 15 m

CRANE EQUIPMENT




FLY JIB
SA 8 m



BALLAST
17.8 t



UNDERCARRIAGE BALLAST
8.0 T

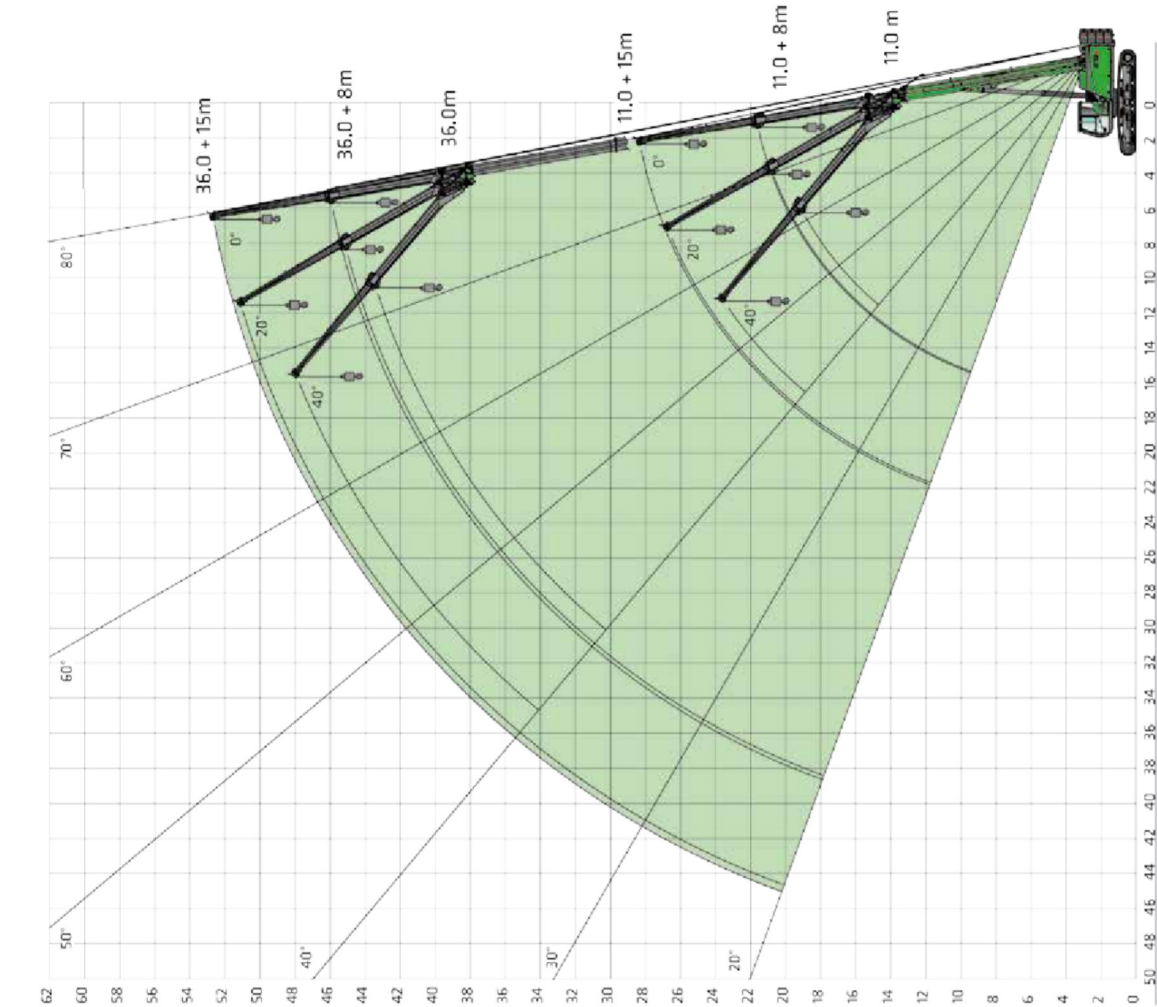

RADIUS [m]		BOOM LENGTH [m]														
		11.0			19.3			24.8			30.3			36.0		
	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°	
2.0	10.0															
3.0	10.0															
4.0	9.7	7.7														
5.0	9.2	6.9					10.0									
6.0	9.0	6.7					9.4									
7.0	7.7	6.2	4.1				8.5	5.8						6.4		
8.0	7.2	5.9	3.9	7.9	5.3		8.2	5.5						6.4		
9.0	6.7	5.2	3.7	7.3	5.0	3.8	7.8	5.2						6.4		
10.0	6.5	5.0	3.6	6.8	4.8	3.7	7.4	5.0	3.8							
11.0	5.5	4.7	3.5	6.5	4.4	3.5	6.7	4.6	3.6	7.2	4.8	3.6	6.1	4.8	3.7	
12.0	5.2	4.6	3.3	5.5	4.2	3.4	6.4	4.4	3.5	6.9	4.7	3.6	6.0	4.6	3.6	
13.0	4.9	4.5	3.2	5.2	4.0	3.3	6.0	4.2	3.4	6.7	4.5	3.5	5.8	4.5	3.5	
14.0	4.7	4.4	3.1	4.9	3.8	3.2	5.7	4.1	3.4	6.4	4.3	3.4	5.6	4.4	3.4	
15.0		4.3		4.6	3.7	3.2	5.3	4.0	3.3	6.1	4.2	3.4	5.4	4.2	3.3	
16.0		3.2		4.4	3.5	3.1	5.1	3.9	3.2	5.9	4.1	3.3	5.2	4.2	3.3	
17.0				4.2	3.4	3.1	4.9	3.8	3.2	5.6	4.0	3.3	5.0	4.1	3.3	
18.0				4.0	3.3	3.1	4.6	3.7	3.1	5.3	3.9	3.3	4.8	4.0	3.2	
19.0				3.9	3.2	3.0	4.4	3.6	3.1	5.1	3.8	3.2	4.6	3.9	3.2	
20.0				3.7	3.1		4.2	3.5	3.1	4.9	3.7	3.1	4.3	3.8	3.2	
21.0				3.6	3.1		4.1	3.4	3.0	4.7	3.6	3.1	4.2	3.7	3.2	
22.0				3.4	3.1		3.9	3.3	3.0	4.4	3.5	3.1	3.9	3.6	3.1	
23.0				3.2	3.0		3.8	3.2	2.9	4.3	3.5	3.0	3.7	3.5	3.1	
24.0							3.7	3.1		4.1	3.4	3.0	3.5	3.3	3.1	
25.0							3.6	3.1		3.7	3.3	3.0	3.3	3.2	3.1	
26.0							3.3	3.1		3.4	3.3	2.9	3.1	3.0	3.1	
27.0							3.0	3.0		3.1	3.2	2.8	3.0	2.7	3.0	
28.0							2.7			2.7	3.1		2.9	2.6	2.9	
29.0							2.4			2.5	2.8		2.5	2.4	2.8	
30.0										2.2	2.3		2.2	2.2	2.4	
32.0										1.9	2.0		1.9	2.0		
34.0													1.5	1.6		
36.0													1.2	1.3		
38.0													0.9			
Number of falls	2	2	1	2	2	1	2	2	2	1	2	2	1	2	2	1
I		0%			100%			100%			100%			100%		100%
II		0%			0%			0%			66%			100%		100%
III		0%			0%			0%			66%			100%		100%

CRANE EQUIPMENT



FLY JIB
SA 15 m



BALLAST
17.8 t



UNDERCARRIAGE BALLAST
8.0 t



EN



TRACK WIDTH
4.1 m

BOOM LENGTH [m]												
RADIUS [m]	11.0			19.3			24.8			30.3		
	0°	20°	40°	0°	20°	40°	0°	20°	40°	0°	20°	40°
2.0	5.0											
3.0	5.0											
4.0	5.0											
5.0	4.8			4.6								
6.0	4.5			4.5			4.3					
7.0	4.3	3.6		4.3			4.3					
8.0	4.1	3.4		4.2			4.2			3.9		
9.0	4.0	3.2		4.0			4.1			3.8	3.4	
10.0	3.6	3.0		3.8	2.9		4.0	2.9		3.7	3.4	
11.0	3.4	2.9	2.3	3.7	2.8		3.9	2.8		3.7	3.3	
12.0	3.3	2.8	2.2	3.5	2.7		3.7	2.8		3.6	3.3	2.7
13.0	3.1	2.8	2.1	3.4	2.6		3.6	2.7		3.5	3.3	2.7
14.0	3.0	2.8	2.0	3.2	2.5	2.0	3.5	2.6	2.1	3.4	3.2	2.6
15.0	2.9	2.6	1.9	3.0	2.4	1.9	3.3	2.5	2.0	3.4	2.5	2.6
16.0	2.8	2.5	1.9	2.9	2.3	1.9	3.2	2.4	2.0	3.3	2.4	2.5
17.0	2.7	2.4	1.8	2.8	2.3	1.9	3.0	2.3	1.9	3.2	2.4	2.0
18.0	2.6	2.3	1.8	2.6	2.1	1.9	2.9	2.3	1.9	3.1	2.3	1.9
19.0	2.6	2.2	1.8	2.5	2.1	1.9	2.8	2.2	1.9	3.0	2.2	1.9
20.0	2.5	2.2	1.8	2.4	2.0	1.8	2.7	2.1	1.8	2.9	2.2	1.9
21.0	2.4	2.1	1.8	2.3	1.9	1.8	2.6	2.1	1.8	2.8	2.1	1.9
22.0	2.3	2.1		2.2	1.9	1.7	2.5	2.0	1.8	2.7	2.1	1.9
23.0				2.1	1.8	1.6	2.4	2.0	1.8	2.6	2.0	1.8
24.0				2.0	1.8	1.6	2.3	1.9	1.7	2.5	2.0	1.8
25.0				2.0	1.8	1.6	2.2	1.9	1.7	2.5	2.0	1.8
26.0				1.9	1.7	1.6	2.2	1.8	1.7	2.4	1.9	1.8
27.0				1.8	1.7		2.2	1.8	1.7	2.3	1.9	1.8
28.0				1.8	1.7		2.1	1.8	1.7	2.2	1.9	1.8
29.0				1.7	1.7		2.1	1.8	1.7	2.2	1.9	1.8
30.0				1.7	1.7		2.0	1.8	1.7	2.1	1.8	1.7
32.0							2.0	1.7		2.0	1.8	1.7
34.0							1.9	1.7		1.9	1.8	1.7
36.0							1.7			1.6	1.7	1.6
38.0										1.3	1.5	1.6
40.0										1.0	1.2	1.0
42.0											0.8	1.0
44.0											0.6	0.7
Number of falls	I	1	1	1	1	1	1	1	1	1	1	1
II	0%	0%	0%	100%	0%	0%	100%	33%	33%	100%	66%	100%
III	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	66%	100%

LOAD CAPACITY SCHEDULES

MAIN BOOM
HA

AUXILIARY JIB
HA-S

HEAVY-DUTY JIB
SLS



TRACK WIDTH		4.1 m	3.2 m	4.1 m	3.2 m	4.1 m	3.2 m
Ballast [t]	Undercarriage ballast [t]	17.8 t	8.0 t	360°	360°	360°	360°
	9.3 t	8.0 t	360°	360°	360°	360°	360°
9.3 t	0 t	360°	-	360°	-	360°	-
0 t	0 t	360°	-	360°	-	360°	-

FLY JIB
SA 8 m

FLY JIB
SA 15 m



TRACK WIDTH		4.1 m	3.2 m	4.1 m	3.2 m
Ballast [t]	Undercarriage ballast [t]	17.8 t	8.0 t	360°	-
	9.3 t	8.0 t	-	-	-
9.3 t	0 t	-	-	-	-
0 t	0 t	-	-	-	-


OPTIONAL EQUIPMENT



0°
20°
40°

Fly jib variants

- FLY JIB 8 m**
10 t load capacity, max. 2-strand,
possible offset angle 0°/20°/40°
- FLY JIB EXTENSION TO 15 m**
8 m with 7 m extension, 5 t load capacity,
max. 1-strand offset angle 0°/20°/40°




AUXILIARY JIB
5 t load capacity, 1-strand




HEAVY-DUTY JIB
25 t load capacity, max. 5-strand,
possible offset angles 0°/20°/40°

- Notes:**
- 1. The specified load ratings given apply when the machine is on firm and level (±0.3°) ground.
 - 2. The load ratings are given in tons and apply 360 degrees.
 - 3. The load capacities correspond to EN 13000.
 - 4. The weight of the load handling equipment (hooks, cable) should be deducted from the load ratings.
 - 5. Load capacities must be limited or reduced in adverse conditions such as soft or uneven ground, slopes, wind, side loads, swinging loads, jolts or sudden stopping of loads, personnel and operators not experienced in handling loads.
 - 6. Permissible cable pull per strand in crane mode for cable diameter 16 mm - 5,000 kg.
 - 7. The load capacities given are for reference only. Please refer to the tables in the operating instructions for the relevant applicable load ratings.
 - 8. Load ratings for tilts of 2° and 4° are also available on request.

TRANSPORT DIMENSIONS

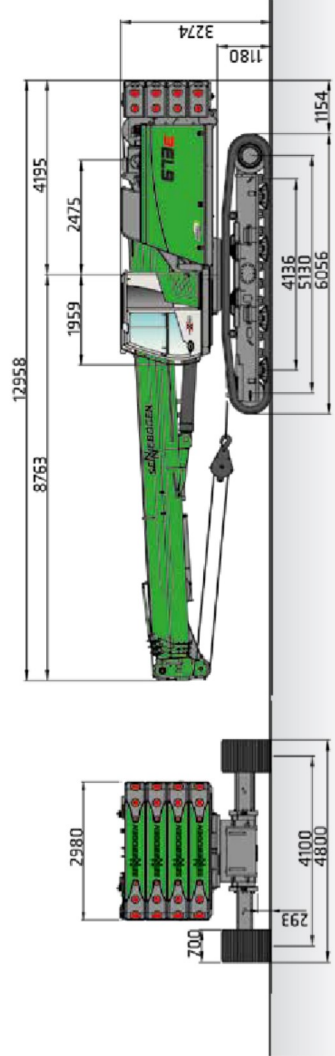

673 R with T73/410 undercarriage and 700 mm triple grouser shoes
Operating weight: approx. 71,800 kg (with 15 m fly jib, 2 hoist winches, counterweight and undercarriage ballast)

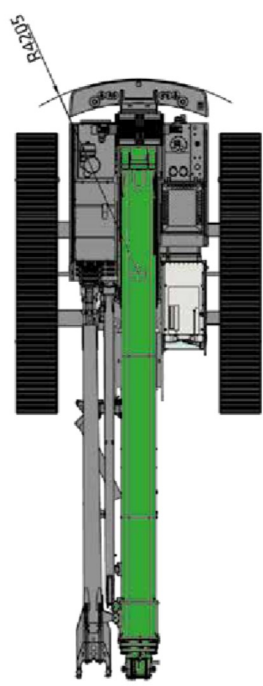

Transport weight: approx. 45,800 kg (without fly jib, 2 hoist winches, without undercarriage ballast, without counterweight)
Transport weight: approx. 53,900 kg (with 15 m fly jib, 2 hoist winches, with undercarriage ballast, without counterweight)

Dimensions in [mm]

TRANSPORT DIMENSIONS

UNDERCARRIAGE BALLAST



Weight: 2 x 4000 kg

STORAGE CONSOLE BALLAST




Weight: 1 x 590 kg

BALLAST BASE PLATE




Weight: 1 x 825 kg

BALLAST PLATE



Weight: 4 x 4250 kg

FLY JIB 8 M



Weight: 730 kg

FLY JIB EXTENSION 7 M




Weight: 305 kg

AUXILIARY JIB 5 T



Weight: 50 kg


HEAVY-DUTY JIB 25 T




Weight: 290 kg

TRANSPORT DIMENSIONS


SELF-ASSEMBLY SYSTEM



2

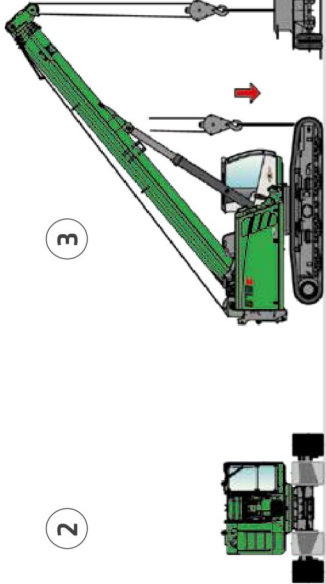

3

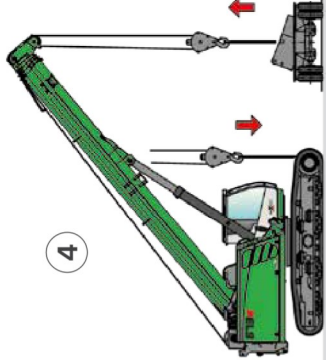


4


Undercarriage ballast

Storage console ballast

5

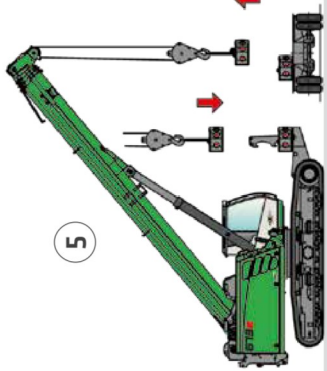

6

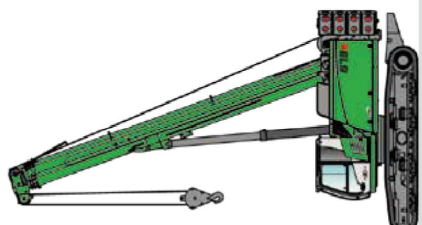

Lift ballast

SELF-ASSEMBLY SYSTEM



www.sennebogen.com/673



Salvage, Switzerland



Sheet pile installation under power line with programmable work area limitation; Netherlands



Lifting operations as a service crane; France



MOVE BIG THINGS - WITH US!

70
over
years of experience

100 %
family company

over 2000
experienced specialists
worldwide

4
production plants
in Germany

180
over
sales and service
partners worldwide

12
different telescopic
cranes



Telescopic crane	Crawler crane	Duty cycle crane	Material handler	Port crane
16-130 t	50-300 t	13.5-300 t	17-420 t	300 t

Telehandler	Balancer
4-5.5 t	130-300 t



SERVICE AND MAINTENANCE

Comprehensive customer service. And supply of spare parts. Service is a TOP priority for us.
➔ www.sennebogen.com/customer-service



RENTAL & USED

Discover the unique range of rental machines available from SENNEBOGEN Rental & Used.
Find your rental machine here:
➔ www.sennebogen-rental-used.com



SENNEBOGEN ACADEMY

Increase your knowledge because success is based on knowledge. In the SENNEBOGEN Academy, we place great importance on ensuring knowledge flows powerfully.
➔ www.sennebogen-academy.com



SENTrack

Efficient fleet management with SENTrack: Use information that would otherwise stay hidden and increase your efficiency.
➔ www.sennebogen.com/sentrack

JOIN OUR OPERATORS' CLUB

The spotlight is on you and your machine! We focus on exclusive information, sharing experiences with other SENNEBOGEN operators as well as fun and enthusiasm.

All the benefits here ➔ www.sennebogen.com/operators-club

This catalog describes machine models, the scope of equipment of individual models, and configuration options (standard equipment and optional equipment) of the machines delivered by SENNEBOGEN Maschinenfabrik GmbH. Machine illustrations may contain optional and supplementary equipment. Actual equipment may vary depending on the country to which the machines are delivered, especially in regard to standard and optional equipment. All product designations used may be trademarks of SENNEBOGEN Maschinenfabrik GmbH or other supplying companies, and any use by third parties for their own purposes may violate the rights of the owners.

Please contact your local SENNEBOGEN sales partner for information concerning the equipment variants offered. Requested performance characteristics are only binding if they are expressly stipulated upon conclusion of the contract. Delivery options and technical features are subject to change. All information is supplied without liability. Equipment is subject to change, and rights of advancement are reserved. © SENNEBOGEN Maschinenfabrik GmbH, Straubing, Germany. Reproduction in whole or in part only with written consent of SENNEBOGEN Maschinenfabrik GmbH, Straubing, Germany.

SENNEBOGEN
Maschinenfabrik GmbH
Hebbelstraße 30
94315 Straubing, Germany

 www.sennebogen.com

MOVE BIG THINGS

SALES SENNEBOGEN

Sales Crane Line

 +49 (0) 9421 / 540 - 146

 cranes@sennebogen.de

SPARE PARTS CENTER

Spare parts orders

 spareparts@sennebogen.de

AFTER SALES

Technical support

 service@sennebogen.de

