

Uplifter

Glassworker GW 425



glass worker




More information can be found at: www.uplifter.com


Features

- » **Lifting capacity max. 425 kg**
- » Reliable to use indoor and outdoor
- » Max. lifting height (vertical) 3,00 m
- » Max. lifting height (overhead) 3,40 m
- » Lifting capacity fully extended 150 kg
- » Optional wireless remote control for lifting arm and suction disc movements
- » Operating time min. 14 hours
- » Individual arrangement of the suction cups
- » Self monitoring system
- » 24 V automotive socket


Diagram

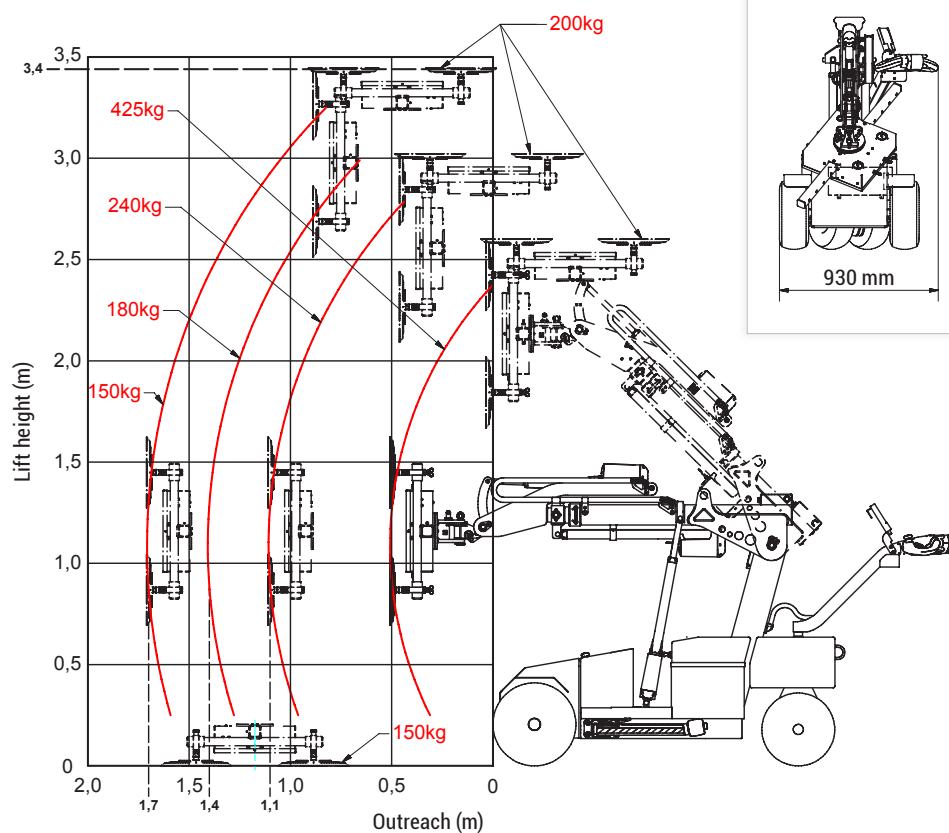



Transport position

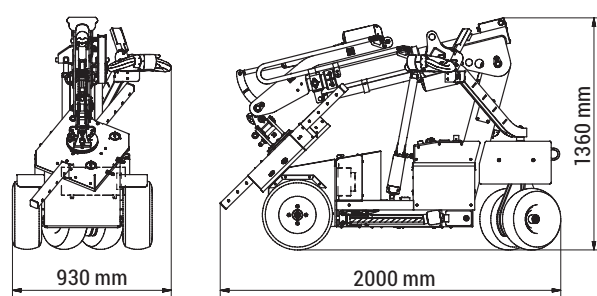

Suction disk configuration

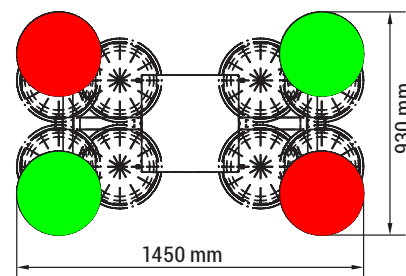

Dimension

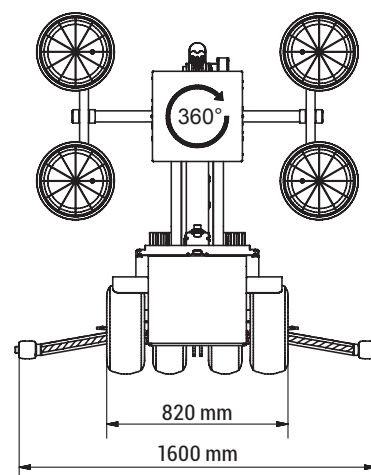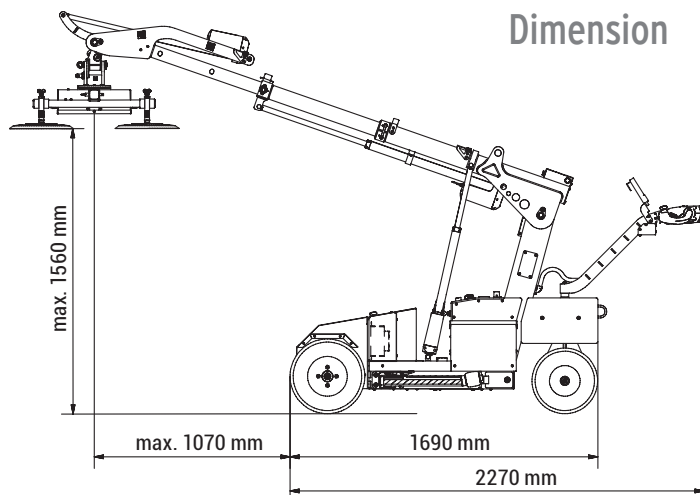

Accessories



» **PU-Tires**
puncture-free tires



» **Twin tires**
optional puncture-free tires



» **Non-marking tires**



» **Storage compartment set**
right and left



» **LED working spotlight**
with magnetic base




» **Ramp**

Additional accessories and special suction cups are available on request.

TECHNICAL DATA	
Lifting capacity	425 kg
Weight	680 kg
Total height	1360 mm
Total width	790 mm
Total length	2000 mm
Lifting capacity fully extended	150 kg
Lifting height verical	until 3,0 m
Lifting height overhead	until 3,4 m
Tilting of the suction disc	forward 109° backwards 84°
Side offset	50 mm in both directions
Charging Voltage	230 Volt
Batteries	24 V / 2x 90 Ah
Front wheel drive	1200 Watt
Vacuum cups	4 x Ø 350 mm
Vacuum system	2-circuit-system



» **Wireless remote control**
in addition to standard
cable remote control

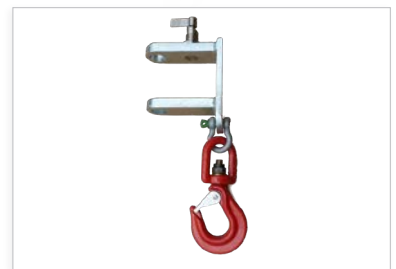

» **Load hook**



» **Covering cap**

Your personal contact:



Modifications and errors reserved. All pictures similar. Update 06.2019

UPLIFTER GmbH & Co. KG

Oberaich 5, 92543 Guteneck, Germany | ☎ +49 9433 20499-0 | fax +49 9433 20499-29 | info@uplifter.com

www.uplifter.com