

## Suction Disc UPG 600-2



For easy glass/glazing elements lifting and handling with vacuum rigs

### UPG 600-2





Order No.: 101778

- » Lifting capacity max. 600 kg
- » 2-circuit-system, 2-fold secured with integrated reserve tank
- » Extension arms allow the handling of even large-scale elements
- » Removable arm
- » Device depth min. 139 mm
- » Suction plate with spring-loaded plunger / joint
- » Manual turning by 360°
- » 12-fold lockable grid, automatic locking after 90°
- » Manual panning without grid
- » Individual arrangement of the vacuum cups without tools
- » Integrated measuring devices for monitoring the vacuum and energy supply
- » Acoustic warning devices
- » Off-grid motor with 12 V, incl. 100/220 V charger



DIN EN 13155

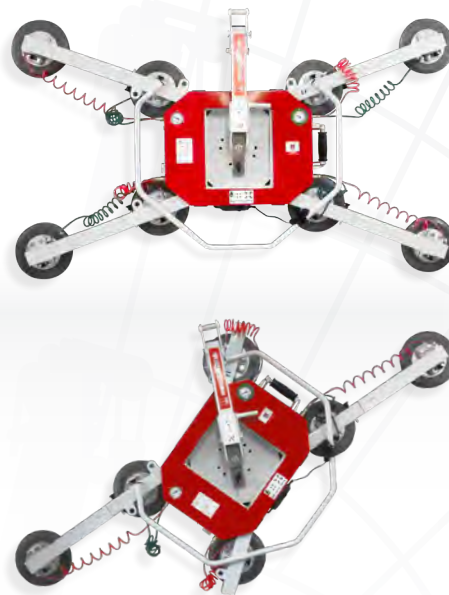





#### Capacity 300 kg

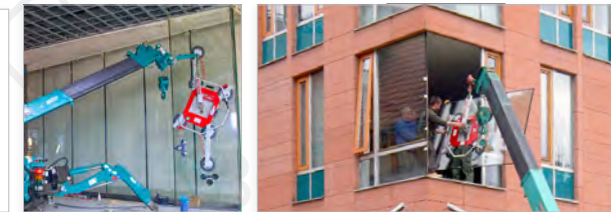

#### Capacity 600 kg

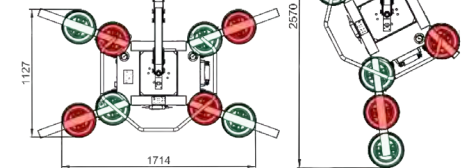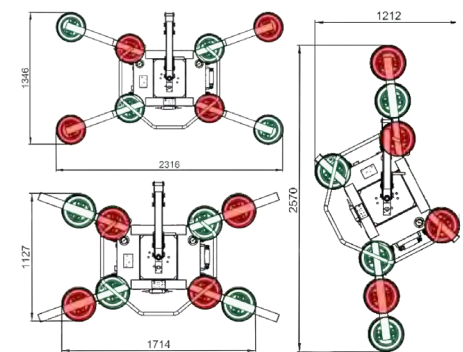

#### Capacity 450 kg / 300 kg

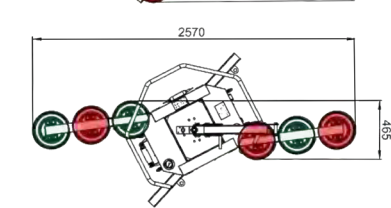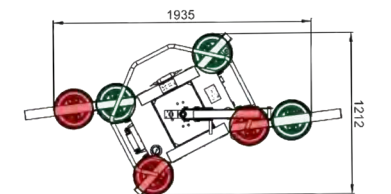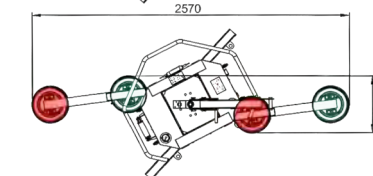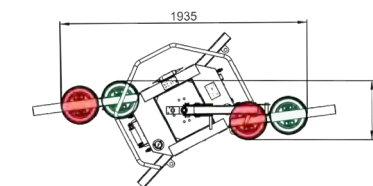

#### TECHNICAL DATA

Vacuum system	2-circuit-system
Vacuum plates	4 pcs.   6 pcs.   8 pcs.
Lifting capacity	300 kg   450 kg   600 kg
Device weight	70 kg   80 kg   89 kg
Height of device	without load-arm min. 139 mm, with load-arm 205 mm
Operating temp. range	0°C to 40°C
Operating time	8 hours
Accessory	incl. wooden transportbox
Optional	Mount-Extensions, UPT 200 transport unit, shortened load arm

» Transport dolly for suction disc, please see TRANSPORT DEVICES.